


- RoHS Compliant (RoHS6).
- Termination finished: Sn-0.7Cu.
- Storage temperature range : -40°C to +125°C.
- Operate temperature range: -40°C to +125°C(including self-temperature rise)


Electrical Specifications @25°C				
Part Number	OCL(uH±10%) @100KHz,1V	DCR (mΩ max)	Hi-pot	Isat(A) @25°C
	1-2	1-2	WDG-Core	1-2
MHW2014SG120K	12	5.0	200Vdc 2mA,2S	22

Saturation Current (Isat) is the current which causes the inductance to drop 20% MAX from the inductance without current

MECHANICAL DIMENSIONS (units mm)

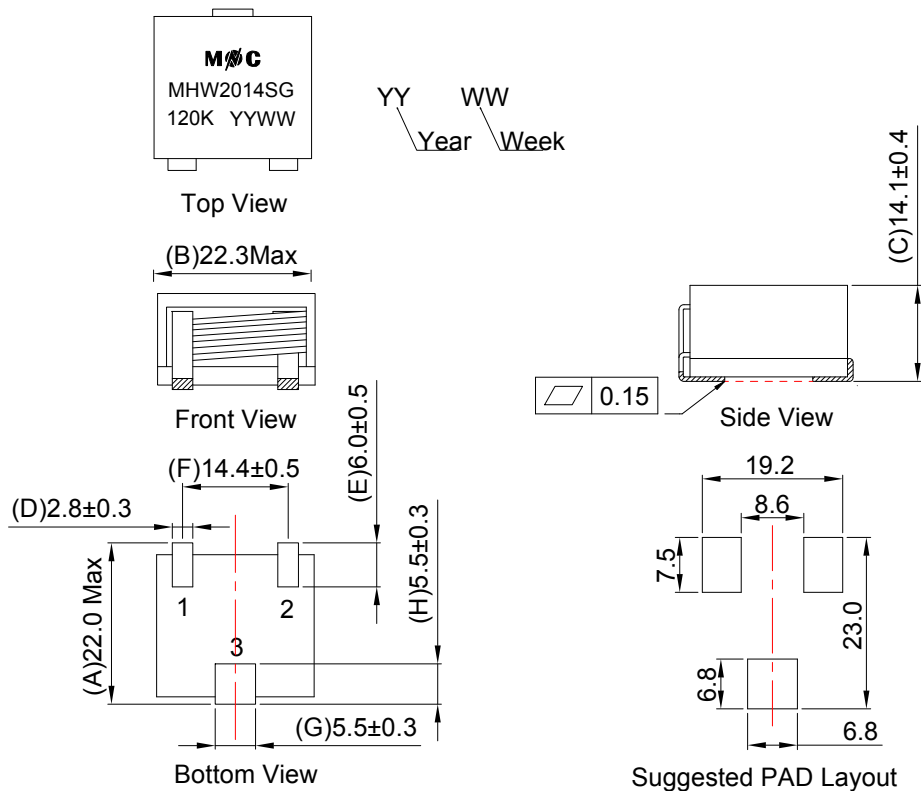

SCHEMATICS

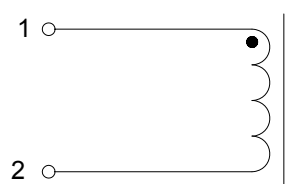

● Start Winding